



McDATA Eclipse™ 4300 SAN Router

The Eclipse™ 4300 offers:

Unbeatable flexibility

- Blended Fabric: FC, GE, iSCSI and iFCP connectivity on demand
- Support for full fabric, private and public loop FC devices

Lower cost of ownership

- Compression to lower WAN bandwidth costs
- E_Port for integration into existing FC fabrics

Scalability and Interoperability

- SAN routing to build large, stable FC fabrics
- Integration of multi-vendor FC fabrics

Superior functionality

- FastWrite for maximizing throughput across long distances
- Quality of Service (QoS): bandwidth management

EFFECTIVE SCALABILITY FOR FIBRE CHANNEL APPLICATIONS


The McDATA Eclipse™ 4300 SAN Router is part of McDATA's family of open storage networking products using standards-based IP, Gigabit Ethernet (GE) and Fibre Channel (FC) for wire-speed storage fabric connectivity.

With support for standard protocols such as iSCSI, iFCP and E_Port, the Eclipse™ 4300 can connect to IP backbones, Fibre Channel (FC) fabrics and a wide variety of end systems, including Fibre Channel, NAS, and iSCSI initiators and targets. Flexible, user-configurable interface types allow the Eclipse™ 4300 to be deployed for multiple, concurrent applications, including disaster recovery, iSCSI access to FC storage and SAN routing.

Disaster recovery backup sites can be very far away, thanks to McDATA's patent-pending FastWrite technology which can sustain wire-speed throughput in spite of the high link latency. The same ports on the Eclipse™ 4300 can also concurrently support iSCSI access to FC storage. McDATA's iSCSI solutions have been demonstrated to be the best performing solutions in the industry. SAN routing enables customers to build very large, stable FC fabrics where by faults in one part of the network don't impact traffic in other parts of the storage network.

The highly reliable and manageable multi-protocol storage fabric extends seamlessly from the data center to the metro area and beyond. McDATA's products are fully compatible with the millions of IP-based LAN, MAN, and WAN routers and switches already installed and mastered by IT professionals.

McDATA's multi-protocol switches are qualified with all major storage platforms, including EMC, HDS, HP, IBM, XIOtech, Sun, StorageTek and LSI Logic.

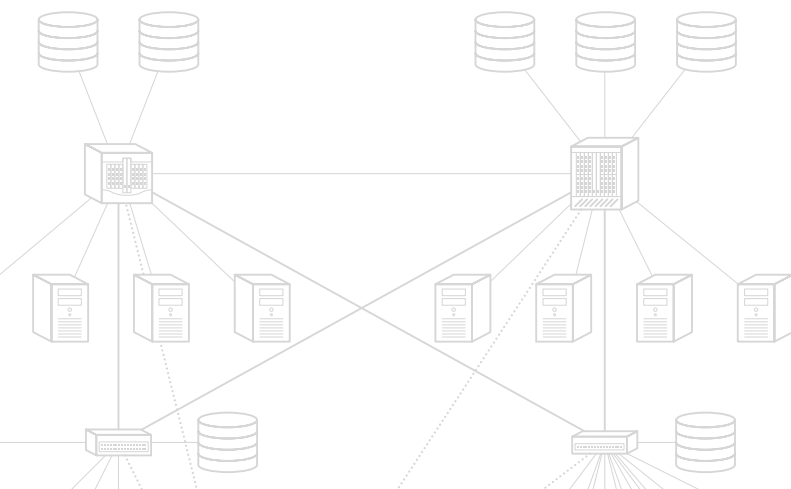

McDATA Eclipse™ 4300 SAN Router



Model Descriptions

Eclipse™ 4300 GE/FC IP storage switch with GE and FC switching support for sixteen MultiService ports. FC ports configurable to 1Gb data rate. Out of band 10/100 Ethernet and serial management ports. Four intelligent ports provide TCP/IP support for connecting to IP campus or WAN backbones.

Protocol Support

Ethernet: Full duplex IEEE 802.3 Gigabit Ethernet standard on each port (1,000 Mbps each direction); 802.3x symmetric flow control; 802.1Q VLAN support; 802.3ad active failover within link-aggregated trunks; Spanning Tree Protocol (STP)

Internet Protocol (IP): TCP, UDP

Fibre Channel: FC-AL, FC-AL-2, FC-FLA, FC-GS-2, FC-GS-3, FC-FG, FC-PH, FC-PH-2, FC-PH-3, FC-PLDA, FC-SW, FC-SW-2, FCP, and E_Port

IP Storage: iSCSI, iFCP, iSNS

QoS: 802.1p Marking, Rate Limiting, Bandwidth Management

Performance: Wire-rate performance on all ports; exclusive Fast Write technology for improved write performance over long distances; support for jumbo frames; compression

Physical Media

MultiService Interfaces use small form factor plug (SFP) modules. Modules are available for both FC and GE supporting multi-mode fiber (MMF), single-mode fiber (SMF), and copper cables.

1000Base-SX: 550m over MMF

1000Base-LX: 10Km over SMF

100-M5-SN-I: 550m over MMF (1Gb FC)

100-SM-LL-L: 10Km over SMF (1Gb FC)

100-TW-EL-S: 33m over shielded twisted-pair (1Gb FC)

LED Indicators

CPU heartbeat, GE/FC link, port activity, port fault, 10/100 Ethernet management port

Management SANvergence® Manager

Centralized Java-based Graphical User Interface (GUI) for network-wide management such as zoning, E_Port configuration, iSCSI LUN virtualization, and device discovery for all SANs in the enterprise.

Element Manager:

Web-based Java applet for configuring, monitoring and troubleshooting individual SAN Routers

Management Interface:

In-band management through GE ports
Out-of-band 10/100 Ethernet management port
Standard SNMP
Fibre Alliance MIB v3.0, MIB-II, RMON groups 1 (statistics), 2 (history), 3 (alarms), and 9 (events), McDATA MIBs
Full Command Line Interface (CLI) via Telnet and/or console port

Internet Storage Name Service (iSNS)

Directory Services for storage devices

Interoperates with existing Fibre Channel SNS

SNMP Support

Power Requirements

U.S./Japan: nominal 100/120 VAC, 50 to 60 Hz

Europe/Australia: nominal 220/240 VAC, 50 to 60 Hz

Power Consumption

Dual redundant power supplies and fans, each with maximum power consumption of 250 watts

Environmental Requirements

Temperature: 41° to 104° F (5° to 40°C)

Humidity: 20% to 85% non-condensing

Size and Weight

Height: 1.72 in (43.7 mm)

Width: 17.0 in (431.8 mm)

Depth: 24.75 in (628.7 mm)

Weight: 26 lb (11.8 Kg)

Regulatory Compliance

Meets safety and emissions requirements
CE, FCC, GS, TUV, UL, VCCI

McDATA Corporate

380 Interlocken Crescent
Broomfield, CO 80021
USA
800.545.5773
720.558.8000

McDATA Europe

Technologiezentrum
Postfach 10 31
D-85501 Ottobrunn
Germany
(49) 89.607.39776

McDATA Asia Pacific

8F Nikko Ichiban-cho Bldg.
13-3 Ichiban-cho, Chiyoda-ku
Tokyo 102-0082
Japan
(81) 3.3512.3671

